

STATE OF MINNESOTA

COUNTY OF HOUSTON

PROPOSAL

FOR HIGHWAY CONSTRUCTION AND MAINTENANCE PROJECTS

With Bids Received Until Monday, October 31, 2016, at 1:00 p.m. at the Houston County Highway Department at 1124 East Washington Street in Caledonia, Minnesota

PROPOSAL OF _____

Name

Address

(Area Code) - Telephone Number

TO FURNISH AND DELIVER ALL MATERIALS AND TO PERFORM ALL WORK IN ACCORDANCE WITH THE CONTRACT, THE PLANS, AND THE APPROVED DEPARTMENT OF TRANSPORTATION "STANDARD SPECIFICATIONS FOR CONSTRUCTION, 2016 EDITION" (USING ENGLISH UNITS), ON FILE IN THE OFFICE OF THE COUNTY AUDITOR EXCEPT AS OTHERWISE STATED IN THE SPECIAL PROVISIONS WHICH ARE PART OF THIS PROPOSAL, FOR:

PROJECT NO.: **CP 2016-24901**
LOCATION: Located on CR 249
TYPE OF WORK: Culvert Invert Repair, Slope Repair, and Aggregate Base
COMPLETION DATE: December 16, 2016

NOTICE TO BIDDERS: In submitting a bid, you must return this complete proposal. You must initial changes made in the Schedule of Prices in the Proposal, and acknowledge addenda on the back cover sheet.

I certify that this Proposal was prepared by me or under my direct supervision, and that I am a licensed professional engineer under the laws of the State of Minnesota.



Brian K. Pogodzinski
License Number 45194 Date: 10/25/16

BID RIGGING IS A SERIOUS CRIME. IF YOU HAVE ANY INFORMATION CONCERNING COLLUSIVE BIDDING, EVEN A REQUEST TO SUBMIT A COMPLIMENTARY BID, PLEASE CALL THE MINNESOTA ATTORNEY GENERAL'S OFFICE AT TELE. NO. 651-296-1796

Houston County Highway Department 2016 Emergency Flood Repair

Bid Documents


Sites: 249-001, 249-003, 249-004, 249-005, 249-006

Project Location

CR 249

Project Schedule

Completion Date: December 16, 2016

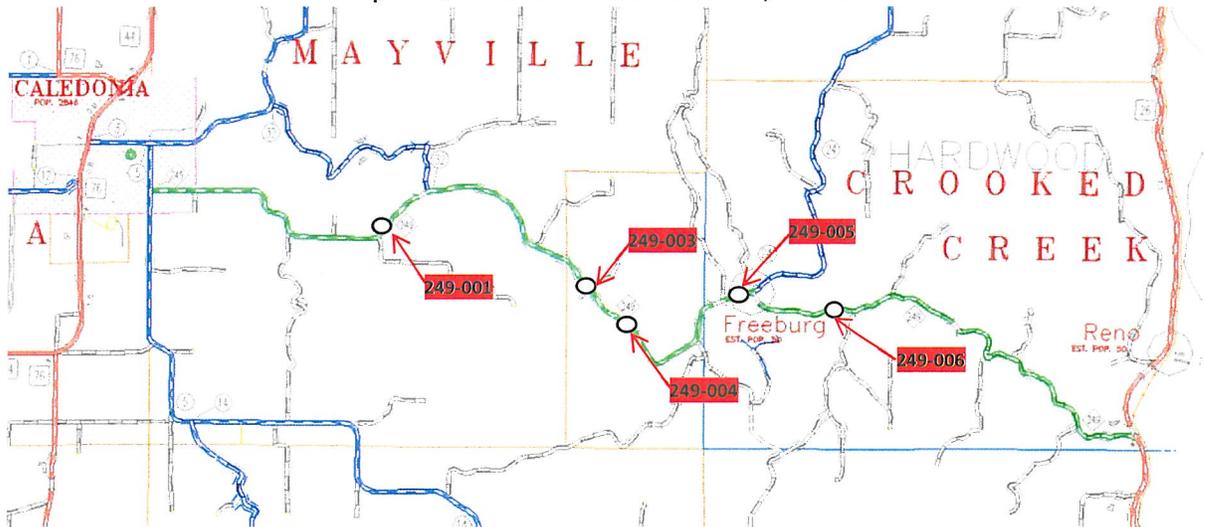

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME
OR UNDER MY DIRECT SUPERVISION AND THAT I AM A
DULY LICENSED PROFESSIONAL ENGINEER UNDER THE
LAWS OF THE STATE OF MINNESOTA.

PRINT NAME: BRIAN K. POBODUNSKY

SIGNATURE: 

DATE: 10/25/16 LIC#: 45194

CP 2016-24901

CR 249 site notes:

Site: 249-001

Approximate Location: 0.63 miles West of CSAH 32

Description of Work: Deliver and place approximately 60 CY of Class IV riprap material along the foreslope. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

Site: 249-003

Location: 2.544 miles West of CSAH 24

Description of work: Perform approximately 100 LF of ditch cleaning & shaping. Deliver and place approximately 20 CY of Class IV riprap material, and approximately 8 CY of concrete grout material at the culvert outlet. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

Site: 249-004

Location: 2.002 miles West of CSAH 24

Description of work: Perform approximately 850 lineal feet of ditch cleaning & shaping. Complete the turf establishment throughout all of the affected areas.

Site: 249-005

Location: 0.121 miles West of CSAH 24

Description of work: Perform approximately 90 LF of ditch cleaning & shaping. Complete the turf establishment throughout all of the affected areas.

Site: 249-006

Location: 0.238 miles West of Dunn Rd.

Description of work: Deliver and place approximately 80 CY of Class IV riprap material, and approximately 20 CY of concrete grout material at the culvert outlet. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

SCHEDULE OF ESTIMATED QUANTITIES

LINE NO.	NOTES	ITEM NO.	ITEM	UNITS	SITE #	TOTAL PROJECT				
					249-001	249-003	249-004	249-005	249-006	
2	1, 2, 3	2105.603	DITCH CLEANING	LN. FT.	100	850	90			1040
4		2461.501	CONCRETE MIX TYPE 3A GROUT	CU. YD.	8			20		28
5	5	2511.501	RANDOM RIPRAP CL. IV	CU. YD.	20			80		160
7	4	2575.555	TURF ESTABLISHMENT	L.S.	0.20	0.20	0.20	0.20	0.20	1

NOTES:

1. TREE AND ROOT MATERIAL TO BE SEPARATED FROM GRANULAR MATERIAL AND HAULED TO HOUSTON COUNTY HIGHWAY DEPARTMENT.
2. REMOVE DEBRIS TO MATCH PRE-FLOOD CONDITION.
3. WASTE MATERIAL BECOMES PROPERTY OF THE CONTRACTOR AND MUST BE DISPOSED OF AT A LOCATION APPROVED BY THE ENGINEER.
4. SEED MIX 25-141 TO BE USED FOR TURF ESTABLISHMENT. HYDRAULIC MATRIX TYPE MULCH OR CATEGORY 3 BLANKET REQUIRED FOR SLOPES 3:1 OR GREATER.
5. GEOTEXTILE FABRIC OR GRANULAR FILTER SHALL BE INCIDENTAL TO THE BID PRICE.

NON-COLLUSION AFFIDAVIT

The following Non-Collusion Affidavit shall be executed by the bidder:

State Project No. _____

Federal Project No. _____

State of Minnesota _____)

) ss

County of _____)

I, _____, do state under penalty of
(name of person signing this affidavit)

perjury under 28 U.S.C. 1746 of the laws of the United States:

(1) that I am the authorized representative of _____

(name of person, partnership or corporation submitting this proposal)

and that I have the authority to make this affidavit for and on behalf of said bidder;

(2) that, in connection with this proposal, the said bidder has not either directly or indirectly entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding;

(3) that, to the best of my knowledge and belief, the contents of this proposal have not been communicated by the bidder or by any of his/her employees or agents to any person who is not an employee or agent of the bidder or of the surety on any bond furnished with the proposal and will not be communicated to any person who is not an employee or agent of the bidder or of said surety prior to the official opening of the proposal, and

(4) that I have fully informed myself regarding the accuracy of the statements made in this affidavit.

Signed: _____
(bidder or his authorized representative)

**Houston County
Schedule Of Prices**

Project Number: C.P. 2016-1201

Project Title or Road Number: CSAH 12

Work Type:

BIDDER MUST FILL IN UNIT PRICES IN NUMERALS; MAKE EXTENSION FOR EACH ITEM AND TOTAL. FOR COMPLETE INFORMATION CONCERNING THESE ITEMS, SEE PLANS AND SPECIFICATIONS, INCLUDING SPECIAL PROVISIONS.

Item No.	Description	Units	Quantity	Unit Price	Total Price
2105.603	DITCH CLEANING	L.F.	1040		
2461.501	CONCRETE MIX TYPE 3A GROUT	CU. YD.	28		
2511.501	RANDOM RIPRAP CL. IV	CU. YD.	160		
2575.555	TURF ESTABLISHMENT	L.S.	1		
Total					

Bidder Name: _____
Bidder Address: _____
Bidder Phone: _____

Date: _____

