

STATE OF MINNESOTA

COUNTY OF HOUSTON

PROPOSAL

FOR HIGHWAY CONSTRUCTION AND MAINTENANCE PROJECTS

With Bids Received Until Monday, November 7, 2016, at 1:00 p.m. at the  
Houston County Highway Department at 1124 East Washington Street in  
Caledonia, Minnesota

PROPOSAL OF \_\_\_\_\_  
Name  
\_\_\_\_\_  
Address  
\_\_\_\_\_  
(Area Code) - Telephone Number

TO FURNISH AND DELIVER ALL MATERIALS AND TO PERFORM ALL WORK IN ACCORDANCE WITH THE CONTRACT, THE PLANS, AND THE APPROVED DEPARTMENT OF TRANSPORTATION "STANDARD SPECIFICATIONS FOR CONSTRUCTION, 2016 EDITION" (USING ENGLISH UNITS), ON FILE IN THE OFFICE OF THE COUNTY AUDITOR EXCEPT AS OTHERWISE STATED IN THE SPECIAL PROVISIONS WHICH ARE PART OF THIS PROPOSAL, FOR:

PROJECT NO.: **CP 2016-801**  
LOCATION: Located on CSAH 8,15,18,25,26, & 33  
TYPE OF WORK: Culvert Invert Repair, Slope Repair, and Ditch Cleaning  
COMPLETION DATE: May 26, 2017

NOTICE TO BIDDERS: In submitting a bid, you must return this complete proposal. You must initial changes made in the Schedule of Prices in the Proposal, and acknowledge addenda on the back cover sheet.

I certify that this Proposal was prepared by me or under my direct supervision, and that I am a licensed professional engineer under the laws of the State of Minnesota.

  
\_\_\_\_\_  
Brian K. Pogodzinski  
License Number 45194 Date: 10/28/16

-----  
BID RIGGING IS A SERIOUS CRIME. IF YOU HAVE ANY INFORMATION CONCERNING COLLUSIVE BIDDING, EVEN A REQUEST TO SUBMIT A COMPLIMENTARY BID, PLEASE CALL THE MINNESOTA ATTORNEY GENERAL'S OFFICE AT TELE. NO. 651-296-1796

# Houston County Highway Department 2016 Emergency Flood Repair

## Bid Documents


Sites: 8-002, 15-001, 15-002, 18-002, 18-003, 25-002, 26-001, 26-002, 26-003,  
33-001

## Project Location

CSAH 8,15,18,25,26,33

## Project Schedule

Completion Date: May 26, 2017

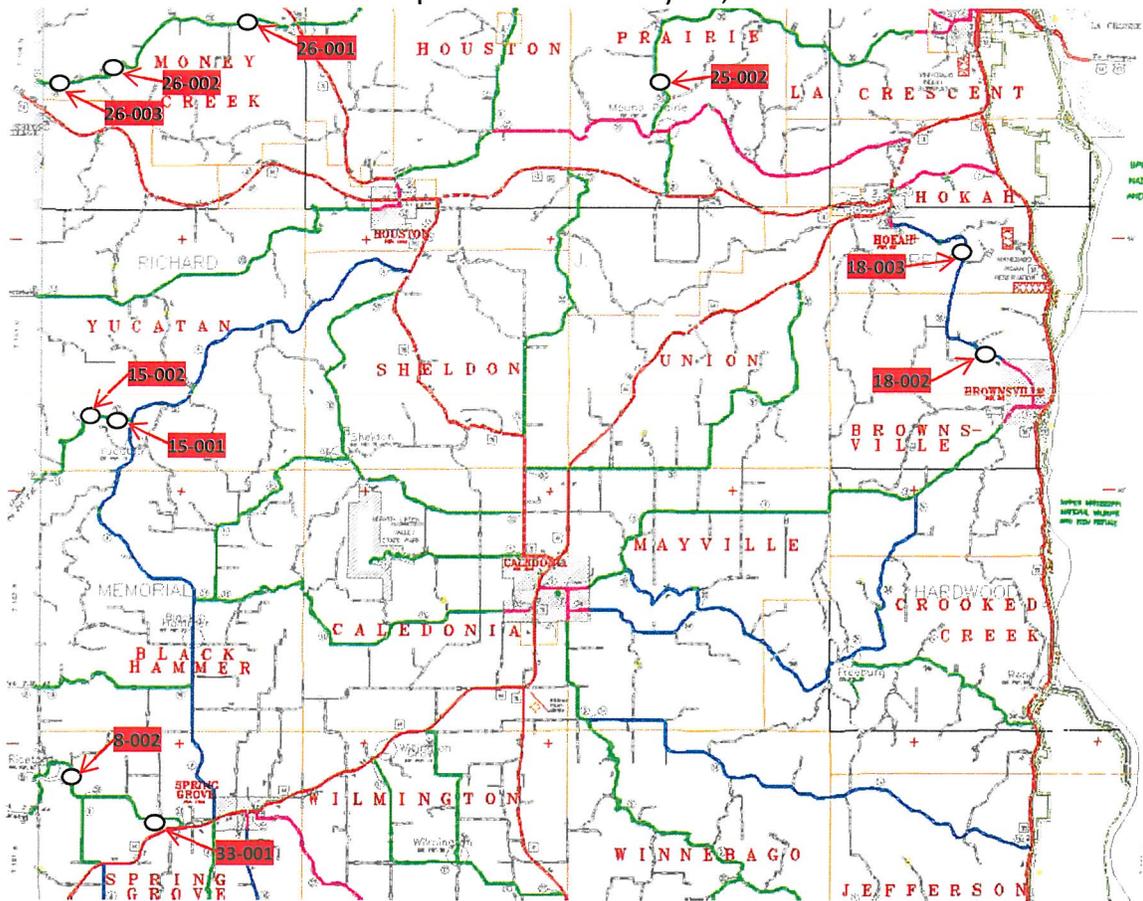

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME  
OR UNDER MY DIRECT SUPERVISION AND THAT I AM A  
DULY LICENSED PROFESSIONAL ENGINEER UNDER THE  
LAWS OF THE STATE OF MINNESOTA.

PRINT NAME: BRIAN K. PODDUNSKI

SIGNATURE: 

DATE: 10/28/16 LIC#: 45194

## CP 2016-801

### CSAH 8 site notes:

**Site:** 8-002

**Approximate Location:** 0.048 miles South of Crib Rd

**Description of Work:** Approximately 2 hours of manual labor and backhoe hours to reposition and tie the culvert outlet apron. There will be approximately 110 CY of debris removal between the inlet and outlet end of the culvert. Approximately 50 CY of topsoil borrow, 30 CY of Class V riprap material, and 100 CY of Quarry Run Riprap material will be needed to restore the site. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

### CSAH 15 site notes:

**Site:** 15-001

**Location:** 0.315 miles West of CSAH 4

**Description of work:** Deliver and place approximately 10 CY of Class IV riprap material at the outlet of the culvert. This work includes preparing and shaping the areas prior to placement. Complete the turf establishment throughout all of the affected areas.

**Site:** 15-002

**Location:** 1.104 miles West of CSAH 4

**Description of work:** Deliver and place approximately 20 CY of class V riprap material at the outlet of the culvert. This work includes preparing and shaping the areas prior to placement. Complete the turf establishment throughout all of the affected areas.

### CSAH 18 site notes:

**Site:** 18-002

**Location:** 0.206 miles East of Border View Dr.

**Description of work:** Approximately 300 LF of ditch cleaning & shaping. Approximately 50 CY of Class IV riprap material, and 20 Ton of aggregate shoulder material will be required to repair the area. This work includes preparing and shaping the areas prior to placement. Complete the turf establishment throughout all of the affected areas.

**Site:** 18-003

**Location:** 0.214 miles North of Peterson Dr.

**Description of work:** Approximately 80 LF of ditch cleaning & shaping. Complete the turf establishment throughout all of the affected areas.

**CSAH 25 site notes:**

**Site:** 25-002

**Location:** 0.888 miles North of CSAH 21

**Description of work:** Approximately 60 LF of ditch cleaning & shaping in the ditch bottom. Approximately 20 Tons of aggregate shoulder material. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

**CSAH 26 site notes:**

**Site:** 26-001

**Location:** 0.286 miles East of Christiansen Hill Rd.

**Description of work:** Approximately 15 CY of Quarry Run Riprap material will be needed to repair the erosion along the roadway. Approximately 10 Tons of aggregate shoulder material will be needed for the shoulder repair. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

**Site:** 26-002

**Location:** 0.440 miles East of River Dr.

**Description of work:** Approximately 250 LF of ditch cleaning & shaping. Complete the turf establishment throughout all of the affected areas.

**Site:** 26-003

**Location:** 0.605 miles West of River Dr.

**Description of work:** Approximately 40 LF of ditch cleaning & shaping. Complete the turf establishment throughout all of the affected areas.

**CSAH 33 site notes:**

**Site:** 33-001

**Location:** 0.025 miles West of Old Indian Trail Rd.

**Description of work:** Deliver and place approximately 20 CY of class IV riprap material at the outlet of the culvert. This work includes preparing and shaping the areas prior to placement. Complete the turf establishment throughout all of the affected areas.

**SCHEDULE OF ESTIMATED QUANTITIES**

LINE NO.	NOTES	ITEM NO.	ITEM	UNITS	SITE #	TOTAL PROJECT										
1	6	2123.501	COMMON LABORERS	HOUR	8-002	15-001	15-002	18-002	18-003	25-002	26-001	26-002	26-003	33-001		2
2	6,7	2123.610	EXCAVATOR	HOUR												2
3	1,2,3	2104.501	REMOVE DEBRIS	CU. YD.												110
4	1,2,3	2105.603	DITCH CLEANING	LIN. FT.				300	80	60		250	40			730
5	8	2211.501	AGGREGATE BASE CLASS 5	TON				20		20	10					50
6		2511.501	RANDOM RIPRAP CL. QUARRY RUN	CU. YD.							15					115
7	5	2511.501	RANDOM RIPRAP CL. IV	CU. YD.				50						20		80
8	5	2511.501	RANDOM RIPRAP CL. V	CU. YD.			20									50
9		2574.525	COMMON TOPSOIL BORROW	CU. YD.												50
10	4	2575.565	TURF ESTABLISHMENT	L.S.	0:100	0:100	0:100	0:100	0:100	0:100	0:100	0:100	0:100	0:100		1

**NOTES:**

- TREE AND ROOT MATERIAL TO BE SEPARATED FROM GRANULAR MATERIAL AND HAULED TO HOUSTON COUNTY HIGHWAY DEPARTMENT.
- REMOVE DEBRIS TO MATCH PRE-FLOOD CONDITION.
- WASTE MATERIAL BECOMES PROPERTY OF THE CONTRACTOR AND MUST BE DISPOSED OF AT A LOCATION APPROVED BY THE ENGINEER.
- SEED MIX 25-141 TO BE USED FOR TURF ESTABLISHMENT. HYDRAULIC MATRIX TYPE MULCH OR CATEGORY 3 BLANKET REQUIRED FOR SLOPES 3:1 OR GREATER.
- GEOTEXTILE FABRIC OR GRANULAR FILTER SHALL BE INCIDENTAL TO THE BID PRICE.
- ITEM TO BE USED FOR REMOVAL AND RETIENG 24" CULVERT APRON. TIES ARE INCIDENTAL TO THE CONTRACT PRICE.
- TRACK EXCAVATOR, 160-265 HP WITH A 1.5 TO 2.5 CUBIC YARD BUCKET.
- ITEM TO BE USED FOR AGGREGATE SHOULDER ADJACENT TO PAVEMENT.

## NON-COLLUSION AFFIDAVIT

The following Non-Collusion Affidavit shall be executed by the bidder:

**State Project No.** \_\_\_\_\_

**Federal Project No.** \_\_\_\_\_

**State of Minnesota** \_\_\_\_\_)

) ss

**County of** \_\_\_\_\_)

I, \_\_\_\_\_, do state under penalty of  
(name of person signing this affidavit)

perjury under 28 U.S.C. 1746 of the laws of the United States:

(1) that I am the authorized representative of \_\_\_\_\_

\_\_\_\_\_  
(name of person, partnership or corporation submitting this proposal)

and that I have the authority to make this affidavit for and on behalf of said bidder;

(2) that, in connection with this proposal, the said bidder has not either directly or indirectly entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding;

(3) that, to the best of my knowledge and belief, the contents of this proposal have not been communicated by the bidder or by any of his/her employees or agents to any person who is not an employee or agent of the bidder or of the surety on any bond furnished with the proposal and will not be communicated to any person who is not an employee or agent of the bidder or of said surety prior to the official opening of the proposal, and

(4) that I have fully informed myself regarding the accuracy of the statements made in this affidavit.

Signed: \_\_\_\_\_  
(bidder or his authorized representative)

**Houston County  
Schedule Of Prices**

**Project Number: C.P. 2016-801**

**Project Title or Road Number: CSAH 8,15,18,25,26,33**

**Work Type:**

BIDDER MUST FILL IN UNIT PRICES IN NUMERALS; MAKE EXTENSION FOR EACH ITEM AND TOTAL. FOR COMPLETE INFORMATION CONCERNING THESE ITEMS, SEE PLANS AND SPECIFICATIONS, INCLUDING SPECIAL PROVISIONS.

Item No.	Description	Units	Quantity	Unit Price	Total Price
2123.501	COMMON LABORERS	HOUR	2		
2123.610	EXCAVATOR	HOUR	2		
2104.501	REMOVE DEBRIS	CU. YD.	110		
2105.603	DITCH CLEANING	LIN. FT.	730		
2211.501	AGGREGATE BASE CLASS 5	TON	50		
2511.501	RANDOM RIPRAP CL. QUARRY RUN	CU. YD.	115		
2511.501	RANDOM RIPRAP CL.IV	CU. YD.	80		
2511.501	RANDOM RIPRAP CL. V	CU. YD.	50		
2574.525	COMMON TOPSOIL BORROW	CU. YD.	50		
2575.555	TURF ESTABLISHMENT	L.S.	1		
<b>Total</b>					

**Bidder**

**Name:**

**Bidder**

**Address:**

**Bidder**

**Phone:**

**Date:**

Project No. CP 2016-801

GRAND TOTAL \$ \_\_\_\_\_

The undersigned hereby acknowledges that all requirements included in the hard copy proposal, addenda, amendments, plans, standard specifications, and supplemental specifications are a part of this bid and contract.

**Signed** \_\_\_\_\_

NON-COLLUSION AFFIDAVIT: A Non-Collusion Affidavit is found in this proposal which must be signed by each bidder.

RECEIPT OF ADDENDA as required by 1210 of the Specifications:

The undersigned hereby acknowledges receipt of and has considered:

Addendum No. \_\_\_\_ Dated \_\_\_\_\_ Addendum No. \_\_\_\_ Dated \_\_\_\_\_

Addendum No. \_\_\_\_ Dated \_\_\_\_\_ Addendum No. \_\_\_\_ Dated \_\_\_\_\_

**Signed** \_\_\_\_\_

EXECUTION OF PROPOSAL as required by 1206 of the Specifications:

This proposal dated the \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_

Signed: \_\_\_\_\_, P.O. Address \_\_\_\_\_ as an individual.

Signed: \_\_\_\_\_, P.O. Address \_\_\_\_\_ as an individual.

doing business under the name and style of \_\_\_\_\_

Signed: \_\_\_\_\_, for \_\_\_\_\_ a partnership.

NAME	BUSINESS ADDRESS
_____	_____
_____	_____
_____	_____

Signed: \_\_\_\_\_, for \_\_\_\_\_ a corporation,

incorporated under the laws of the State of Minnesota

Name of President \_\_\_\_\_ Business Address \_\_\_\_\_

Name of Vice-President \_\_\_\_\_ Business Address \_\_\_\_\_

Name of Secretary \_\_\_\_\_ Business Address \_\_\_\_\_

Name of Treasurer \_\_\_\_\_ Business Address \_\_\_\_\_

(NOTE: Signatures shall comply with 1206 of the Specifications.)