

STATE OF MINNESOTA

COUNTY OF HOUSTON

PROPOSAL

FOR HIGHWAY CONSTRUCTION AND MAINTENANCE PROJECTS

With Bids Received Until Monday, October 31, 2016, at 1:00 p.m. at the Houston County Highway Department at 1124 East Washington Street in Caledonia, Minnesota

PROPOSAL OF _____

Name

Address

(Area Code) - Telephone Number

TO FURNISH AND DELIVER ALL MATERIALS AND TO PERFORM ALL WORK IN ACCORDANCE WITH THE CONTRACT, THE PLANS, AND THE APPROVED DEPARTMENT OF TRANSPORTATION "STANDARD SPECIFICATIONS FOR CONSTRUCTION, 2016 EDITION" (USING ENGLISH UNITS), ON FILE IN THE OFFICE OF THE COUNTY AUDITOR EXCEPT AS OTHERWISE STATED IN THE SPECIAL PROVISIONS WHICH ARE PART OF THIS PROPOSAL, FOR:

PROJECT NO.: **CP 2016-BR01**
LOCATION: Located on various Houston County roadways
TYPE OF WORK: Bridge slope repair and debris removal
LENGTH: N/A
COMPLETION DATE: December 16, 2016

NOTICE TO BIDDERS: In submitting a bid, you must return this complete proposal. You must initial changes made in the Schedule of Prices in the Proposal, and acknowledge addenda on the back cover sheet.

I certify that this Proposal was prepared by me or under my direct supervision, and that I am a licensed professional engineer under the laws of the State of Minnesota.



Brian K. Pogodzinski
License Number 45194 Date: 10/25/16

BID RIGGING IS A SERIOUS CRIME. IF YOU HAVE ANY INFORMATION CONCERNING COLLUSIVE BIDDING, EVEN A REQUEST TO SUBMIT A COMPLIMENTARY BID, PLEASE CALL THE MINNESOTA ATTORNEY GENERAL'S OFFICE AT TELE. NO. 651-296-1796

Houston County Highway Department 2016 Emergency Flood Repair

Bid Documents


Sites: 3-007, 4S-004, 4N-001, 5-021, 5-022, 10-020, 12-020, 15-003,
18-001, 18-004, 19-001, 25-001, 31-001, 249-007

Project Location

CSAH 3, 4, 5, 10, 12, 15, 18, 19, 25, 31, and CR 249

Project Schedule

Completion Date: December 16, 2016

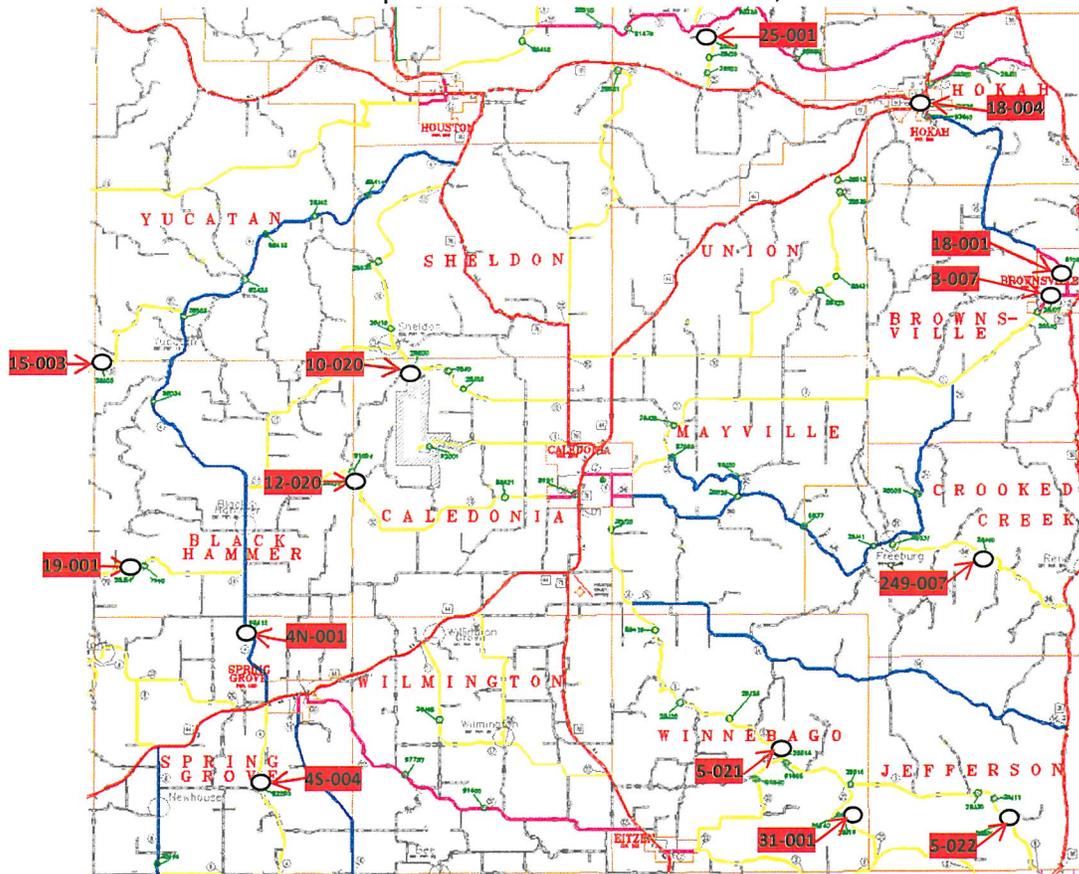

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME
OR UNDER MY DIRECT SUPERVISION AND THAT I AM A
DULY LICENSED PROFESSIONAL ENGINEER UNDER THE
LAWS OF THE STATE OF MINNESOTA.

PRINT NAME: BRYAN K. POBODZINSKI

SIGNATURE: 

DATE: 10/25/16 LIC#: 45194

Bridge Repairs

County Road 249 site notes:

Site: 249-007; Br. #28J49

Location: 2.7 miles West of TH 26

Description of Work: Deliver and place approximately 50 CY of Class V riprap material at the culvert outlet. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

CSAH 3 site notes:

Site: 3-007; Br. #28J07

Location: 0.039 miles East of Cork Hollow Dr.

Description of work: Deliver and place approximately 30 CY of Class V riprap material at the culvert outlet. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

CSAH 4 site notes:

Site: 4S-004; Br. #92280

Location: 0.015 miles North of Newhouse Dr.

Description of work: Remove approximately 10 CY of woody debris from the inlet of the culvert. Deliver and place approximately 30 CY of Class V riprap material at the culvert outlet. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

CSAH 4 site notes:

Site: 4N-001; Br. #88412

Location: 0.375 miles South of Braaten Dr.

Description of work: Remove approximately 40 CY of material from the fore slope. Deliver and place approximately 50 CY of quarry run riprap material in the fore slope areas. The material shall be keyed in. This work includes preparing and shaping the area prior to placement. Deliver install approximately 20 CY of Class 5 shoulder material to repair the shoulder washout areas. Complete the turf establishment throughout all of the affected areas.

CSAH 5 site notes:

Site: 5-021; Br. #28514

Location: 0.132 miles West of CSAH 23

Description of work: Remove approximately 24 CY of woody debris. Deliver and place approximately 100 CY of Class V riprap material. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

Site: 5-022; Br. #28524

Location: 0.057 miles East of Coral Dr.

Description of work: Deliver and place approximately 200 CY of Class V riprap material. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

CSAH 10 site notes:

Site: 10-020; Br. #28530

Location: 0.6 miles South East of the JCT with CSAH 11

Description of work: Remove approximately 30 CY of woody debris from the underside of the bridge. Complete the turf establishment throughout all of the affected areas.

CSAH 12 site notes:

Site: 12-020; Br. #28526

Location: 2.3 miles East of the JCT with CSAH 11

Description of work: Remove approximately 100 CY of woody debris from the underside of the bridge. Deliver and place approximately 78 CY of Class V riprap material in front of the abutments. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

CSAH 15 site notes:

Site: 15-003; Br. #28508

Location: 0.2 miles East of the West County line

Description of work: Remove approximately 30 CY of woody debris from under and around the bridge. Complete the turf establishment throughout all of the affected areas.

CSAH 18 site notes:

Site: 18-001; Br. #91590

Location: 0.4 miles North of CSAH 3

Description of work: Approximately 150 LF of ditch cleaning/shaping. Clean and remove the rubble and debris from the inside of the culvert. This work will include the removal of the material. Complete the turf establishment throughout all of the affected areas.

Site: 18-004; Br. #28506

Location: 0.1 miles SE of TH 44

Description of work: Deliver and place approximately 70 CY of Class V riprap material at the in front of the West abutment. This work includes preparing and shaping the area prior to placement. Complete the turf establishment throughout all of the affected areas.

CSAH 19 site notes:

Site: 19-001; Br. #28J51

Location: 1.226 miles East of the West County Line

Description of work: Remove approximately 30 CY of debris and rubble removal from near the inlet of the culvert. Complete the turf establishment throughout all of the affected areas.

CSAH 25 site notes:

Site: 25-001; Br. #28528

Location: 0.3 miles South of CSAH 21

Description of work: Remove approximately 200 CY of woody debris that is lodged above and around pier #2. It will be the contractors responsibility to gain access to pier #2 which is located in the water. Complete the turf establishment throughout all of the affected areas.

CSAH 31 site notes:

Site: 31-001; Bridge #28J18

Location: 1.2 miles Northwest Of CSAH 2

Description of work: Approximately 100 LF of ditch cleaning/shaping. Clean and remove approximately 100 CY of sediment material from the culvert. This work will include the removal of the material. Complete the turf establishment throughout all of the affected areas.

SCHEDULE OF ESTIMATED QUANTITIES

LINE NO.	NOTES	ITEM NO.	ITEM	UNITS	SITE # 3-007	SITE # 4S-004	SITE # 4N-001	SITE # 5-021	SITE # 5-022	SITE # 10-020	SITE # 12-020	SITE # 15-003	SITE # 18-001	SITE # 18-004	SITE # 19-001	SITE # 25-001	SITE # 31-001	SITE # 249-007	TOTAL PROJECT
1	1, 2, 3	2104.507	REMOVE DEBRIS	CU. YD.		10		24		30	100	30			30	200	100		524
2		2105.501	COMMON EXCAVATION	CU. YD.			40												40
3	1, 2, 3	2105.603	DITCH CLEANING	LN. FT.									150				100		250
4		2211.501	AGGREGATE BASE CLASS 5	TON			20												20
5	5	2511.501	RANDOM RIPRAP CL. QUARRY RUN	CU. YD.			50												50
6	5	2511.501	RANDOM RIPRAP CL. V	CU. YD.	30	30	100	200		78				70					558
7	4	2575.555	TURF ESTABLISHMENT	L.S.	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	1

NOTES:

1. TREE AND ROOT MATERIAL TO BE SEPARATED FROM GRANULAR MATERIAL AND HAULED TO HOUSTON COUNTY HIGHWAY DEPARTMENT.
2. REMOVE DEBRIS TO MATCH PRE-FLOOD CONDITION.
3. WASTE MATERIAL BECOMES PROPERTY OF THE CONTRACTOR AND MUST BE DISPOSED OF AT A LOCATION APPROVED BY THE ENGINEER.
4. SEED MIX 25-141 TO BE USED FOR TURF ESTABLISHMENT. HYDRAULIC MATRIX TYPE MULCH OR CATEGORY 3 BLANKET REQUIRED FOR SLOPES 3:1 OR GREATER.
5. GEOTEXTILE FABRIC OR GRANULAR FILTER SHALL BE INCIDENTAL TO THE BID PRICE.

NON-COLLUSION AFFIDAVIT

The following Non-Collusion Affidavit shall be executed by the bidder:

State Project No. _____

Federal Project No. _____

State of Minnesota _____)

) ss

County of _____)

I, _____, do state under penalty of
(name of person signing this affidavit)

perjury under 28 U.S.C. 1746 of the laws of the United States:

(1) that I am the authorized representative of _____

(name of person, partnership or corporation submitting this proposal)

and that I have the authority to make this affidavit for and on behalf of said bidder;

(2) that, in connection with this proposal, the said bidder has not either directly or indirectly entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding;

(3) that, to the best of my knowledge and belief, the contents of this proposal have not been communicated by the bidder or by any of his/her employees or agents to any person who is not an employee or agent of the bidder or of the surety on any bond furnished with the proposal and will not be communicated to any person who is not an employee or agent of the bidder or of said surety prior to the official opening of the proposal, and

(4) that I have fully informed myself regarding the accuracy of the statements made in this affidavit.

Signed: _____
(bidder or his authorized representative)

**Houston County
Schedule Of Prices**

Project Number: C.P. 2016-BR01

Project Title or Road Number: Bridge Repairs

Work Type:

BIDDER MUST FILL IN UNIT PRICES IN NUMERALS; MAKE EXTENSION FOR EACH ITEM AND TOTAL. FOR COMPLETE INFORMATION CONCERNING THESE ITEMS, SEE PLANS AND SPECIFICATIONS, INCLUDING SPECIAL PROVISIONS.					
Item No.	Description	Units	Quantity	Unit Price	Total Price
2104.507	REMOVE DEBRIS	CU. YD.	524		
2105.501	COMMON EXCAVATION	CU. YD.	40		
2105.603	DITCH CLEANING	L.F.	250		
2211.501	AGGREGATE BASE CLASS 5	TON	20		
2511.501	RANDOM RIPRAP CL. QUARRY RUN	CU. YD.	50		
2511.501	RANDOM RIPRAP CL. V	CU. YD.	558		
2575.555	TURF ESTABLISHMENT	L.S.	1		
Total					

Bidder

Name:

Bidder

Address:

Bidder

Phone:

Date:
